



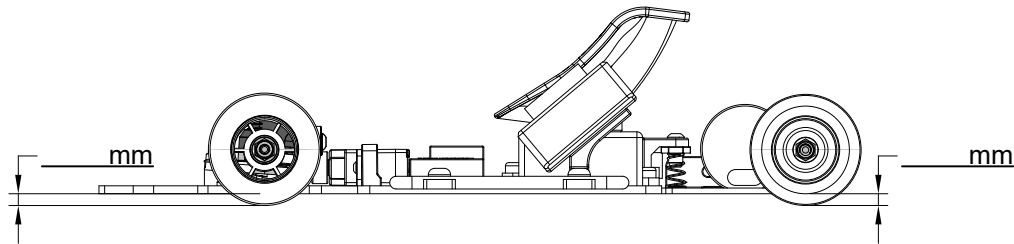

# GK-200 Ver.1.0 SETTING SHEET

|         |             |           |                                 |                               |                                |
|---------|-------------|-----------|---------------------------------|-------------------------------|--------------------------------|
| Driver: | Airtemp:    | Size:     | <input type="checkbox"/> Open   | <input type="checkbox"/> Med. | <input type="checkbox"/> Tight |
| Date:   | Humidity:   | Traction: | <input type="checkbox"/> High   | <input type="checkbox"/> Med. | <input type="checkbox"/> Low   |
| Track:  | Track temp: | Surface:  | <input type="checkbox"/> Smooth | <input type="checkbox"/> Med. | <input type="checkbox"/> Bumpy |

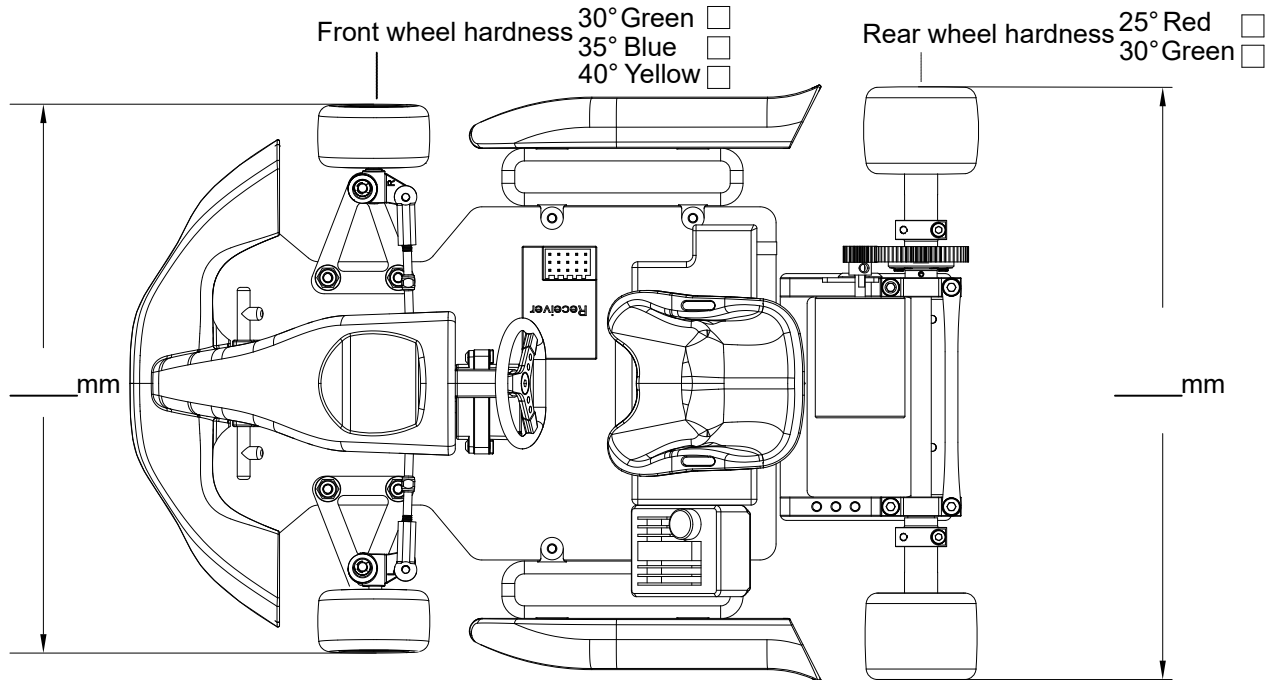

|  |  |   |                                 |  |
|--|--|---|---------------------------------|--|
| front suspension axle<br><input type="checkbox"/> 2°<br><input type="checkbox"/> 3°  | Regulating spring column<br>   | Carbon fiber tail plate of motor base<br>                       | Rear axle replacement<br>       | Counterweight selection<br>  |
| (Front spring)<br><br><input type="checkbox"/> Soft(gold)<br><input type="checkbox"/> Medium(silver)<br><input type="checkbox"/> Hard(black) | (Spring Color Selection)<br><br><input type="checkbox"/> Soft(gold)<br><input type="checkbox"/> Medium(silver)<br><input type="checkbox"/> Hard(black) | <input type="checkbox"/> 1.60mm <input type="checkbox"/> 1.80mm | Differential straight shaft<br> | <input type="checkbox"/> Installed counterweight<br><input type="checkbox"/> Not equipped with counterweight |

## Front suspension shim selection Rear Axle Shims Selection Motor base gasket

|  |   |   |  |
|--|---|---|--|
| Front suspension shim (The first half)<br><br>TS0201038 H=2.00mm<br><input type="checkbox"/> x1 <input type="checkbox"/> x2<br>TS0201039 H=3.00mm<br><input type="checkbox"/> x1 | Front suspension shim (The latter part)<br><br>TS0201038 H=2.00mm<br><input type="checkbox"/> x1 <input type="checkbox"/> x2<br>TS0201039 H=3.00mm<br><input type="checkbox"/> x1 | Rear wheel replacement shim selection<br><br>TS0501019 H=0.25mm<br><input type="checkbox"/> x2<br>TS0501020 H=0.50mm<br><input type="checkbox"/> x2 | Rear axle fixing seat connector washer<br><br>TS0501016 H=0.50mm<br><input type="checkbox"/> x2<br>TS0501017 H=1.00mm<br><input type="checkbox"/> x2 |
|--|---|---|--|

|             |            |   |                     |    |
|-------------|------------|---|---------------------|----|
| Motor       | Spur gear  | T | Pinion gear         | T  |
| Front wheel | Front tire |   | Front tire diameter | mm |
| Rear wheel  | Rear tire  |   | Rear tire diameter  | mm |
| Battery     | Best lap   |   |                     |    |
| Memo        |            |   |                     |    |