


Driver: _____	Airtemp: _____	Size: <input type="checkbox"/> Open <input type="checkbox"/> Med. <input type="checkbox"/> Tight
Date: . .	Humidity: _____	Traction: <input type="checkbox"/> High <input type="checkbox"/> Med. <input type="checkbox"/> Low
Track: _____	Track temp: _____	Surface: <input type="checkbox"/> Smooth <input type="checkbox"/> Med. <input type="checkbox"/> Bumpy

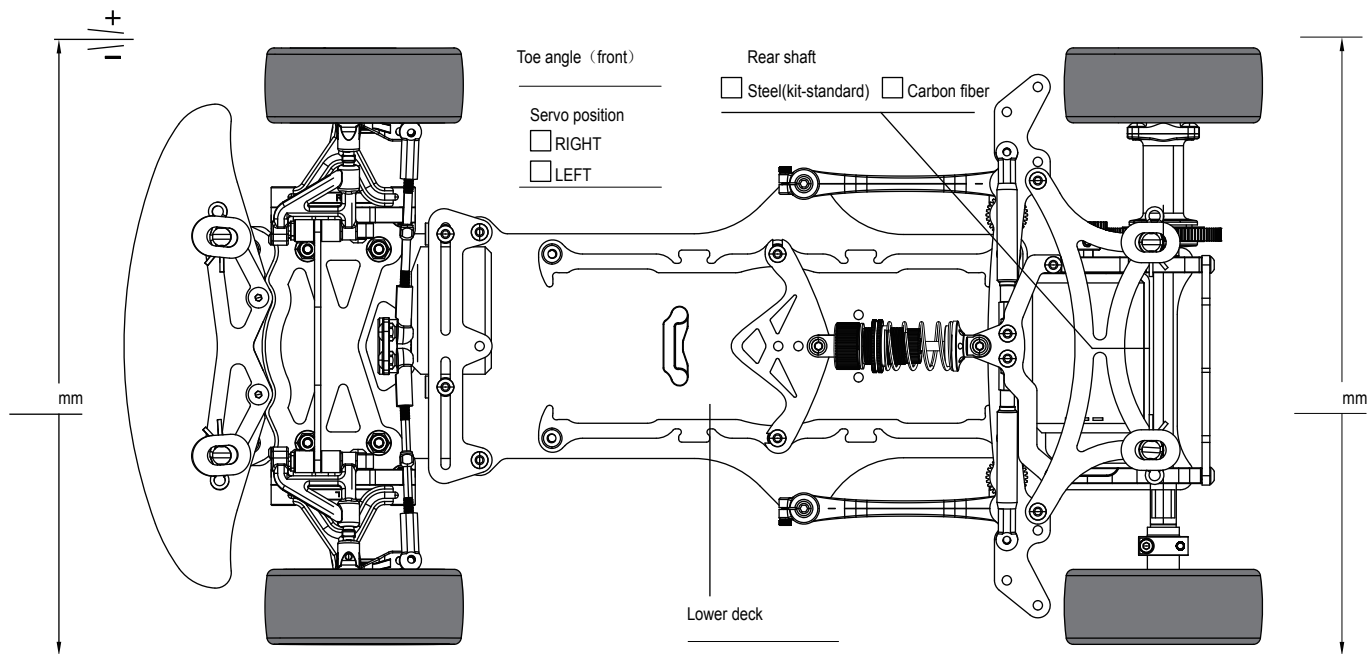

### 《Front》


#### Wheel Base

☐ Short ☐ Mid ☐ Long

- ☐ 0.5mm
- ☐ 1.0mm
- ☐ 2.0mm
- ☐ 5.0mm

#### FR shim RR Shim


- ☐ 1.80° Thick Thin
- ☐ 3.25° Thin Thick
- ☐ 6.15° --- Thick, Thin
- ☐ 10°
- ☐ 5°
- ☐ 0°



Ground clearance \_\_\_\_\_ mm


### 《Front spring》

- ☐ Soft(gold)
- ☐ Medium(silver)
- ☐ Hard(black)




### 《Damper》

#### Coil spring Roll damper


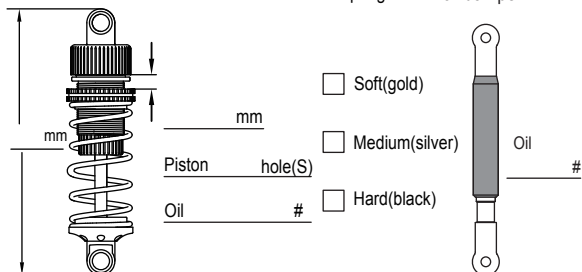


### 《Rear》

Spacer \_\_\_\_\_ mm

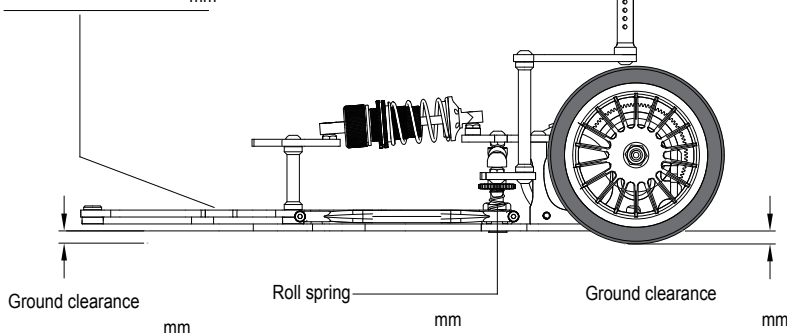

### 《Rear ground clearance》

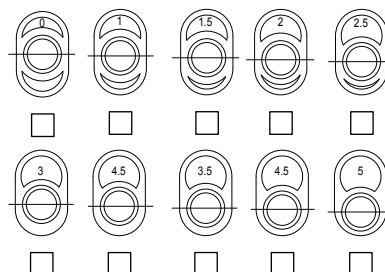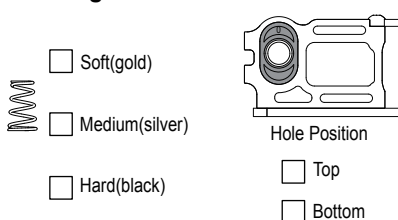

Motor _____	Spur gear _____ T _____	Pinion gear _____ T _____
Front wheel _____	Front tire _____	Front tire diameter _____ mm
Rear wheel _____	Rear tire _____	Rear tire diameter _____ mm
Body _____	Front wing _____	Rear wing _____
Battery _____	Best lap _____	
Memo _____		